

D.S.B. Maskinafd.

F-norm
12.99-1

Tegn. Rev. Godk. Kalk.

Stillepind for bremseklods
(m. slids og hul.)

S. 62.

F.S.A.

10-4


14

A B C D

Normen erstatter

Materiale: St. 37

Tegn./Norm.	Pos.
CC _{VI} 12.98.3	1
NV. 12.99	1
G. 12.98-3	1
1KA. 12.97	4
FS _{III} 12.97	1
NV. 12.98	9
307L-22.125II	7
AUM. 12.96	2
AC _{II} 12.96	2
CR. 12.105	3
CR. 12.110	3
CR. 12.100	

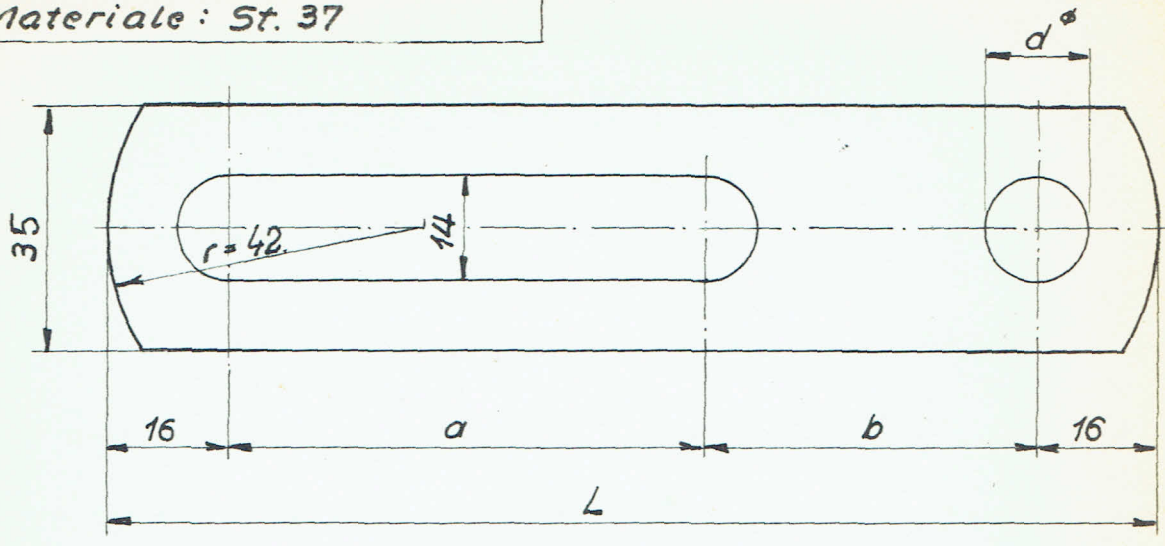

E 3891-07-023	5
MK _{II} 12.98	6
PB. 12.98	4
DM. 12.96	3
TGS. 12.96	2
NV. 12.102	3
MK 12.98	6
1A _{II} 12.98	1
NV. 12.102	3
TGS _{II} 12.96	13
1NV. 12.98	2
54511	4
48485	

1:1

~

A

Forandringer.

Dim. ændr.	Pos. 5 slettet.	18.1.67	9.5.67	10.10.69	16.10.70
		F.S.A.	S.A.P.	F.S.A.	S.A.P.
A					
B					
C					
Pos. 2 slettet i hh. T-meld. vkr. Ar. 8-9-69 L-mbl. ændr. fra 202 til 212 0 ... 125 til 135 f. Pos. 1					

6	145	73	40	14	} Se F-norm 12.98-1, -2, -3
5	188	112	44	16,5	
4	157	83	42	16,5	
3	232	115	85	14	
2	262	100	130	14	
1	212	135	45	14	
Pos.	L	a	b	d ^ø	For anvendelse: