
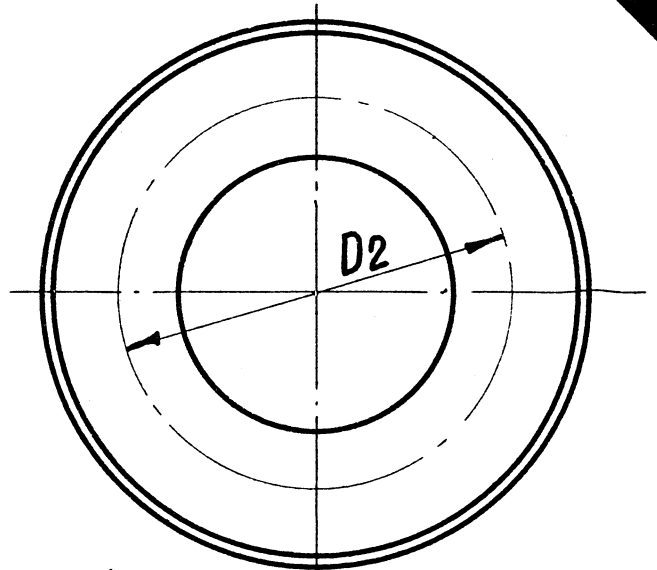


0

F-Norm
DSBProfilpakninger.
Manchetter.

46.192-1

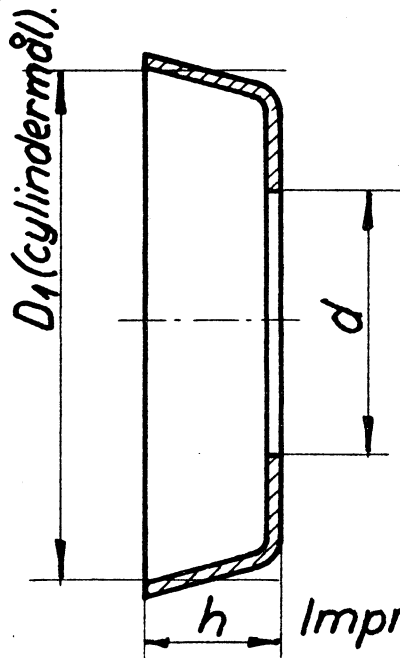

Imprægneres efter aftale.

d	D ₁	D ₂	Knorr nr.	Antal huller f. støtter.	Anvendes til:	Mindsteb. Kh.	Ar.	
100	203	155		4 stk 1/2"	8" støbejerncylinder.	15	10	
130	203	155	4111.21.7.	6 stk 3/8"	8" pladecylinder.	25	15	
145	255	180		6 stk 1/2"	10" støbejerncylinder.	25	25	
180	255	205	4111.31.7.	8 stk 3/8"	10" pladecylinder.	25	25	
180	300	220		6 stk. 1/2"	12" støbejerncylinder.	10	10	
210	300	244	4111.41.7.	8 stk. 3/8"	12" pladecylinder.	25	15	
234	355	275		8 stk 1/2"	14" støbejerncylinder	4	4	
273	355	300	4111.51.7.	9 stk 3/8"	14" pladecylinder.	25	15	
279	405	320		8 stk. 1/2"	16" støbejern	4	4	
310	405	345	4111.61.7.	11 stk 10mm.	16" pladecylinder.	4	4	
			h. Westinghou					
60	140	100	21	Bl. 406.B. pos.3 1003-27	6 stk 8mm	Ardelt skiftecycl.(1'og2'gear)	10	10
60	125	88	21	Bl. 405.B. pos.3 1003-26	6 stk 8mm	do. do. (3'gear)	10	10
50	100	70	18	Bl. 404.B. pos.3 1003-25	6 stk 6,5mm	do. do. (4'og5'gear)	15	15
55	100	70	18	Bl. 385.B pos.3 1003-25	6 stk 6,5mm	do. do. (revers gear)	15	15
Rekvissionsbetegnelse.					Materiale.	Model nr.	Mindstebeh.	
Pakning F-Norm 46.192-1, d x D ₁					Læder.		Se tabel.	

1955