

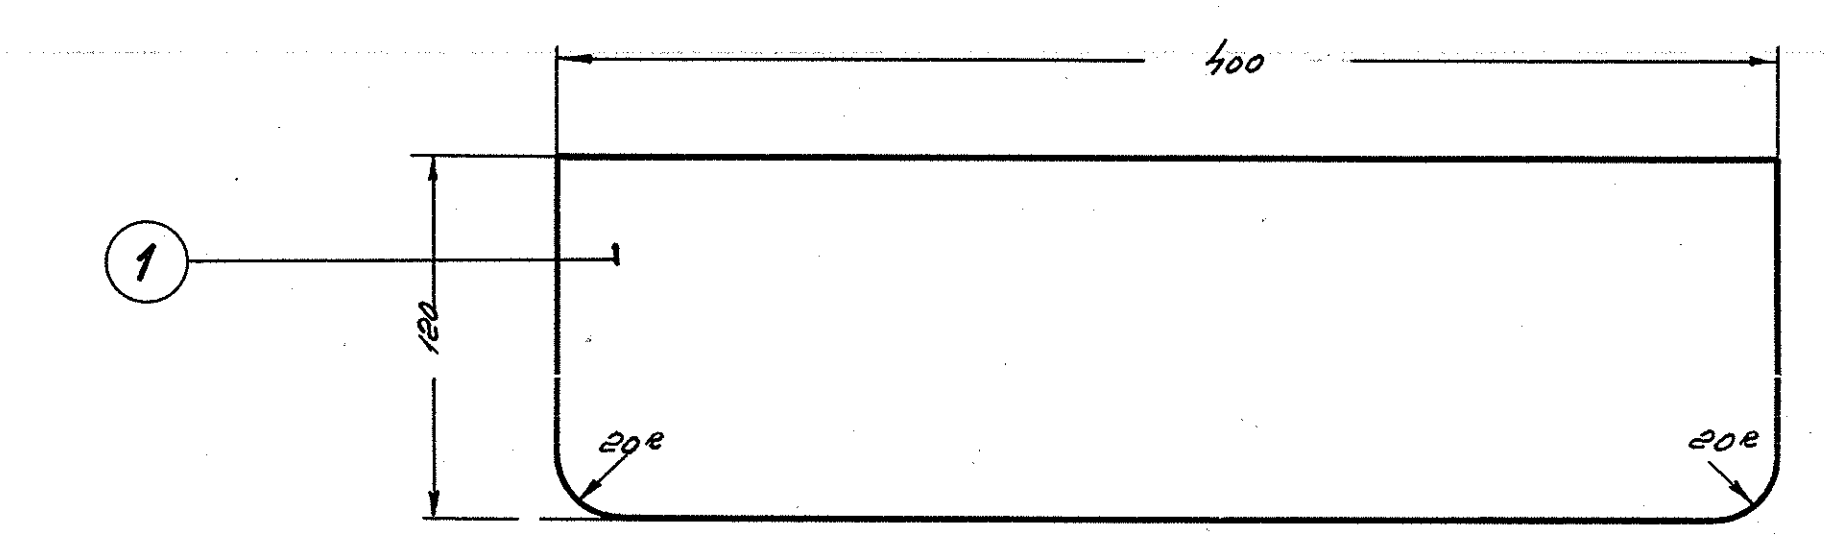
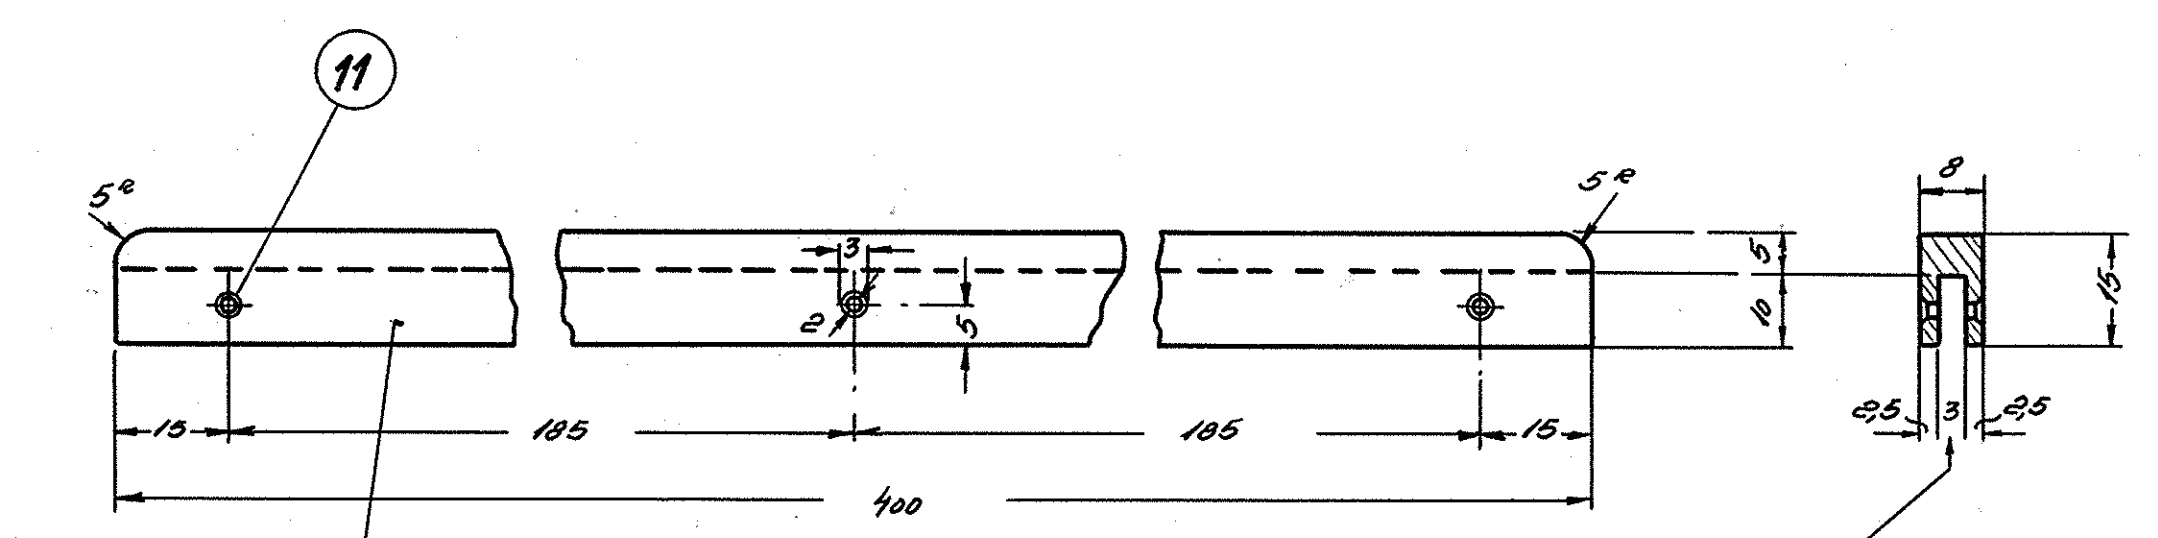
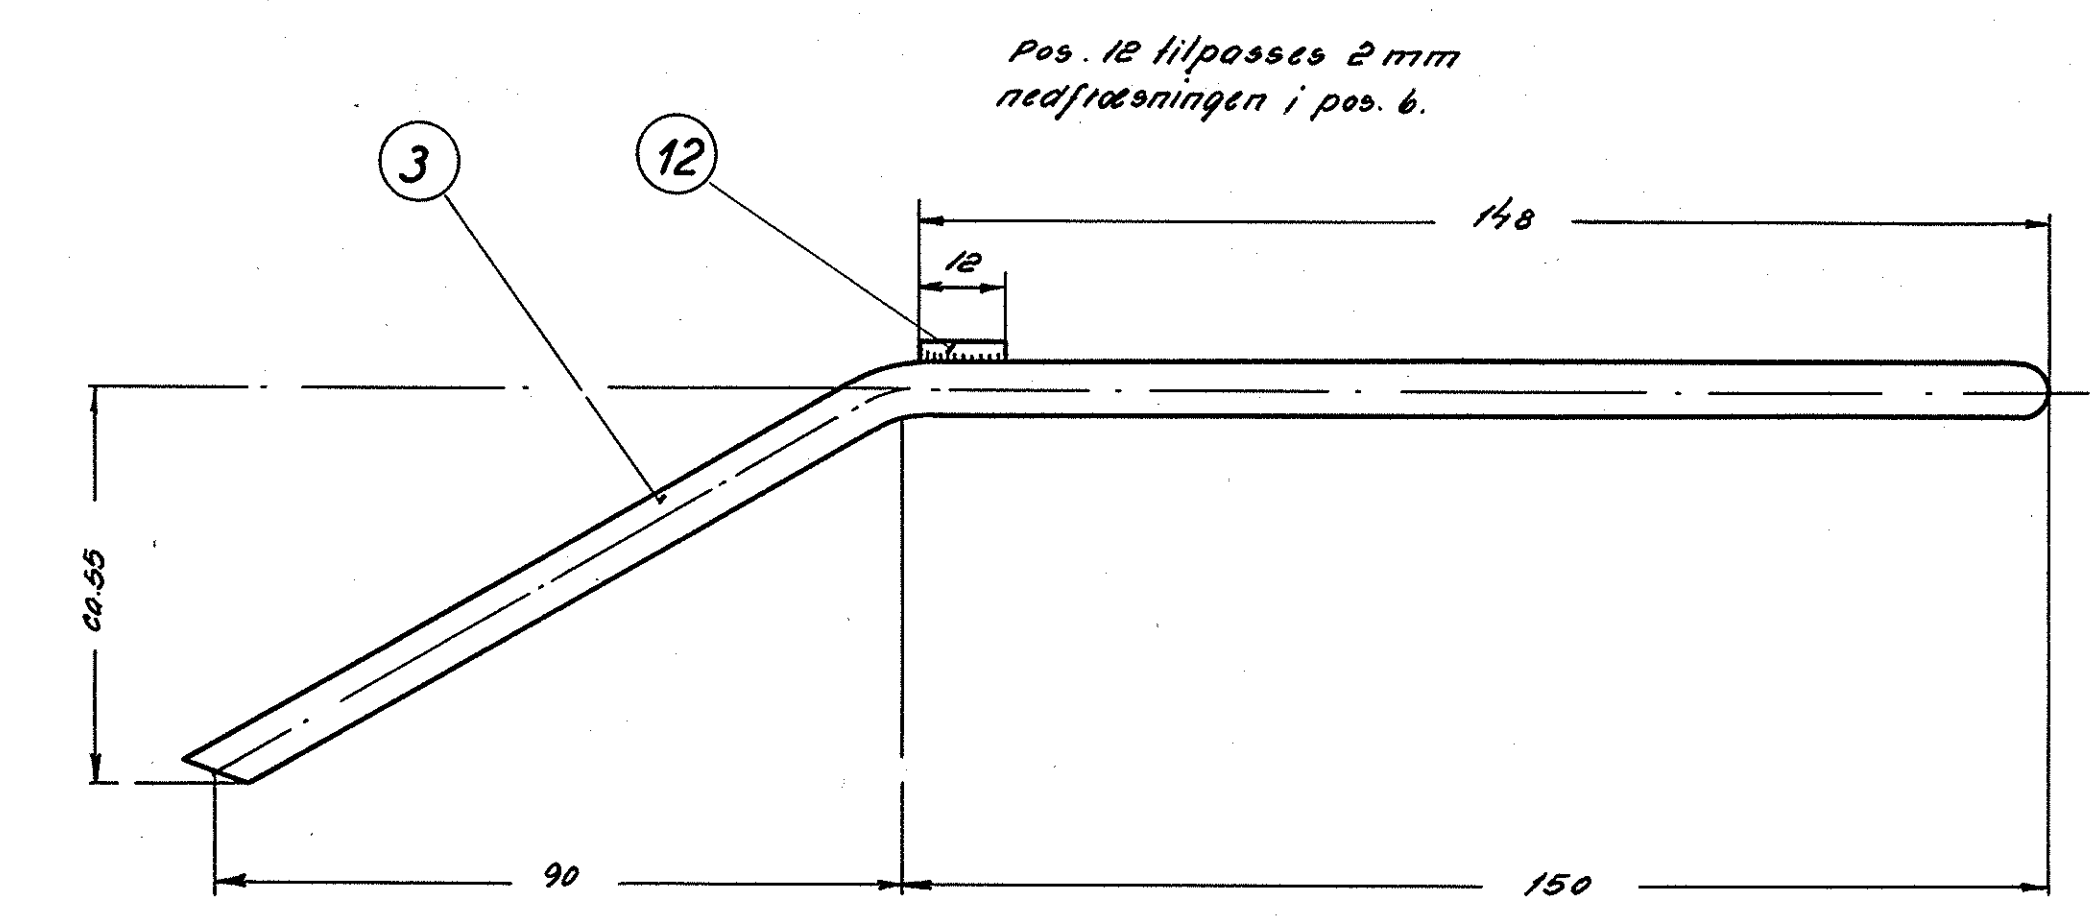









Snit-a-a-

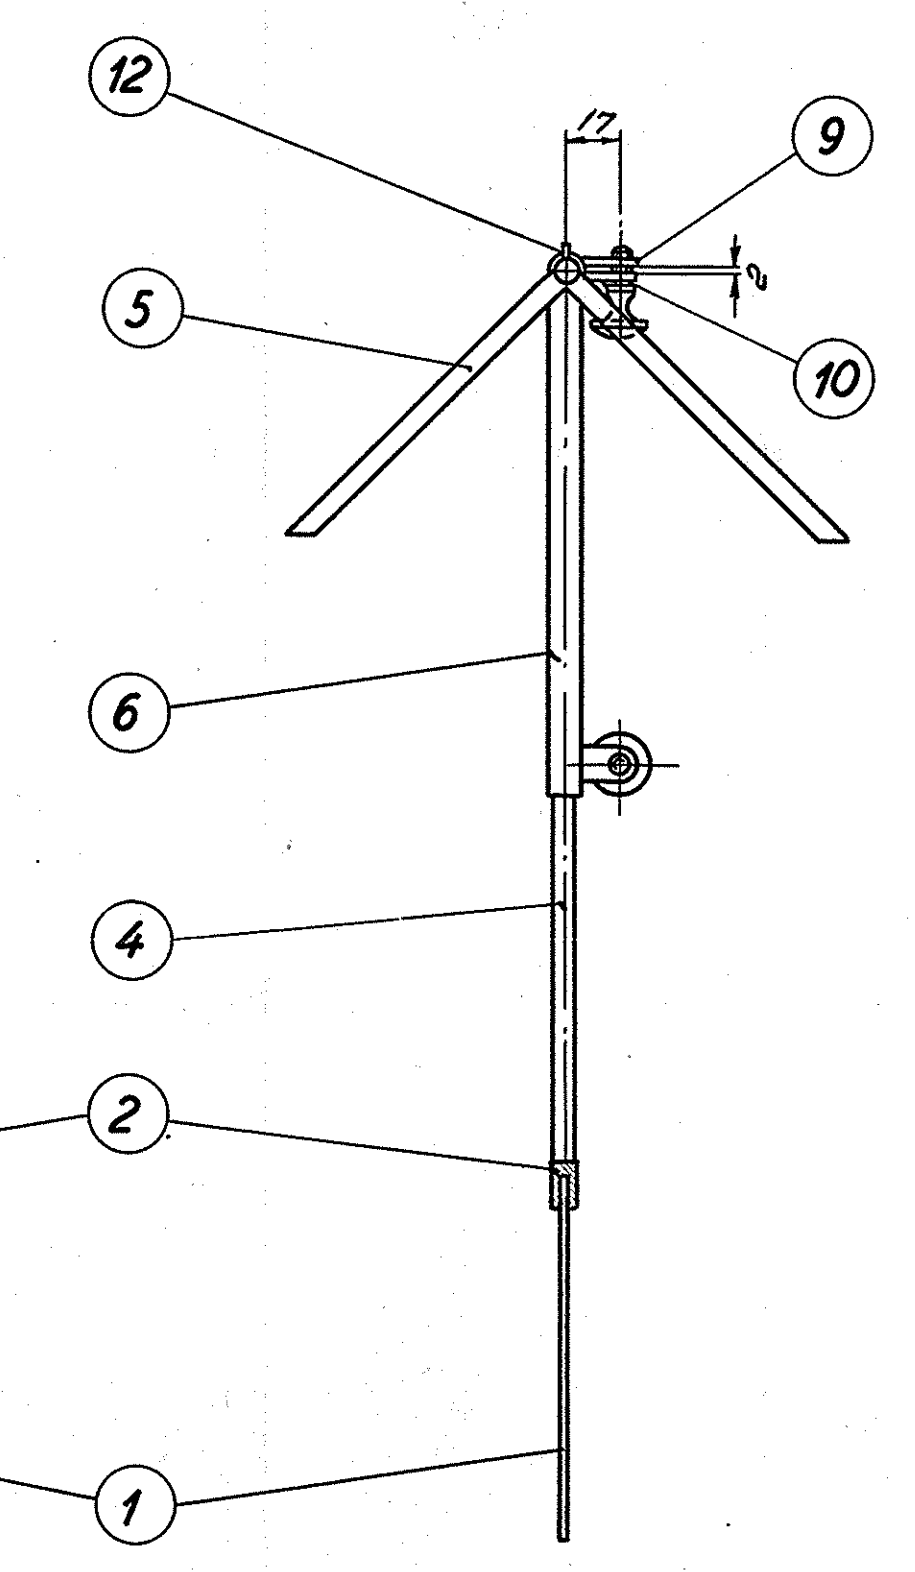

2 mm fræsning i begge sider af røret
1 mm kun i en side som vist.

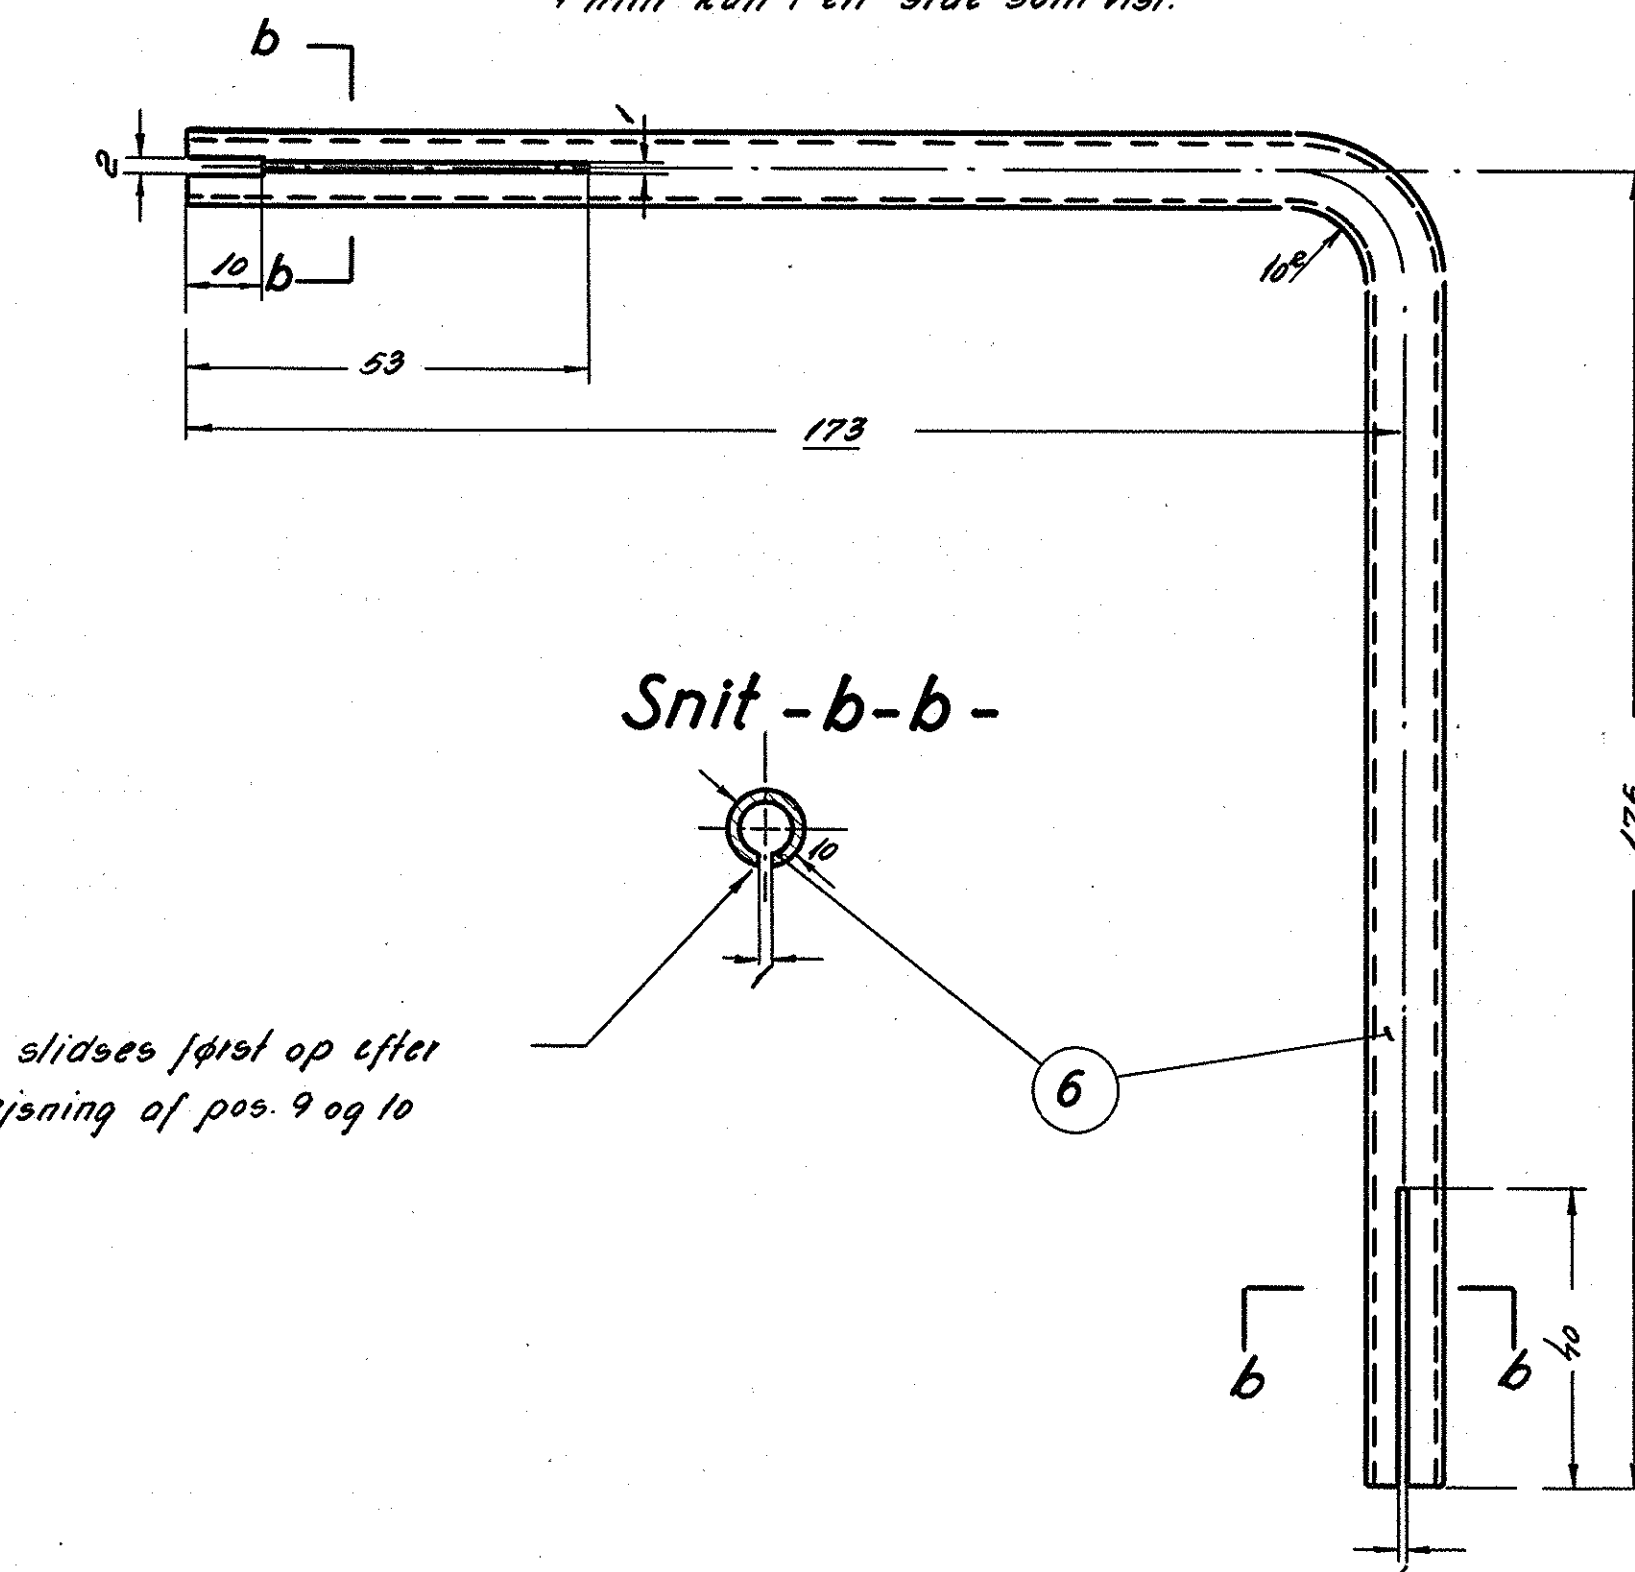

Røret slides først op efter
påsejning af pos. 9 og 10

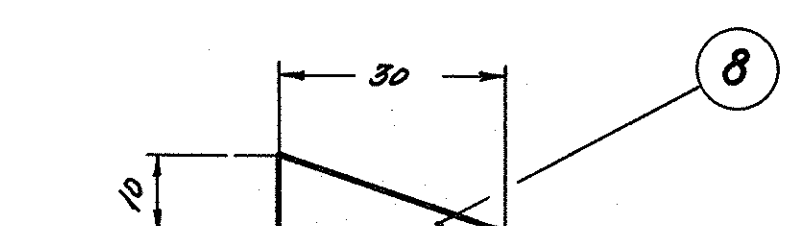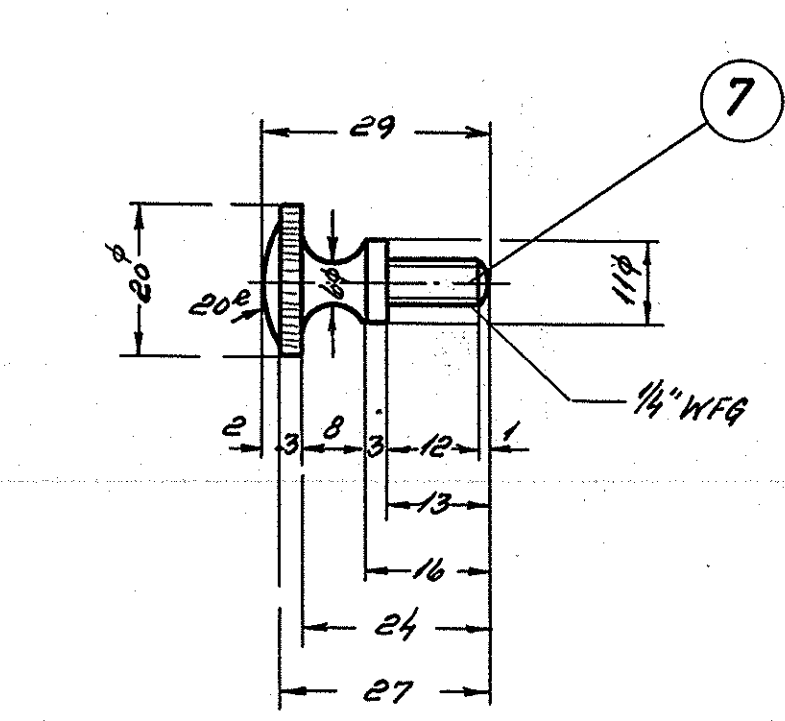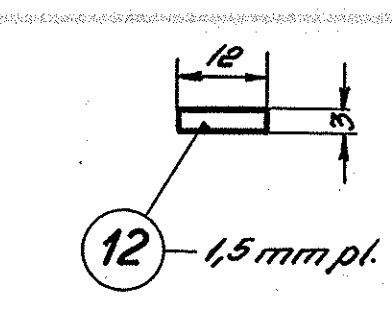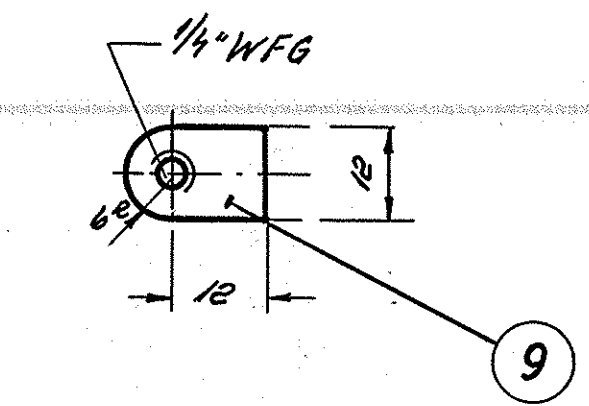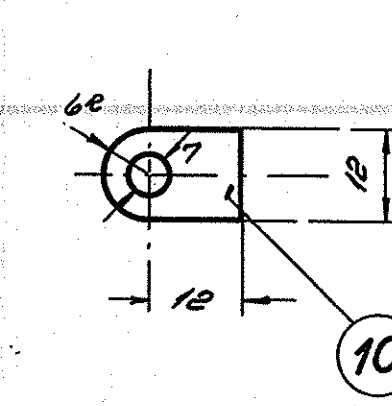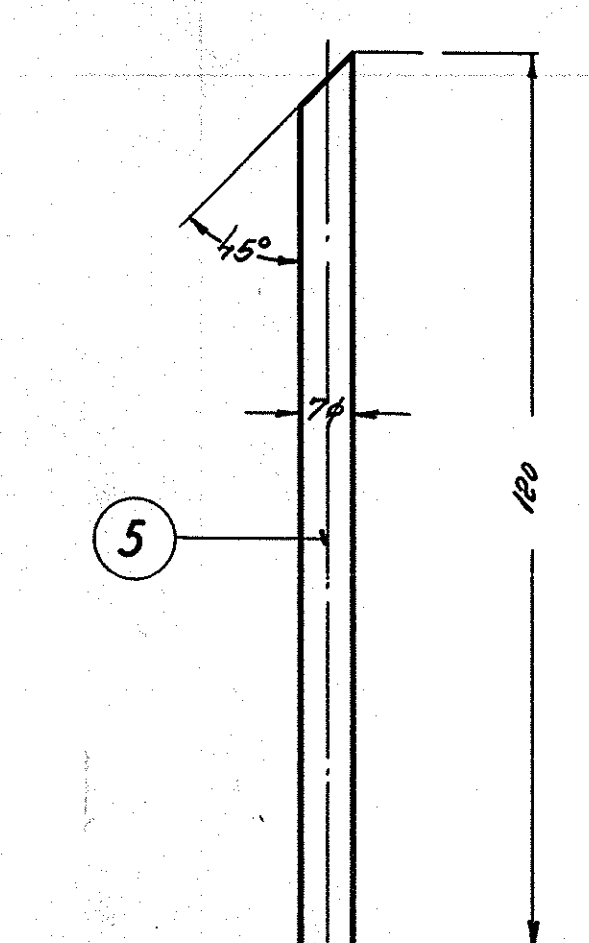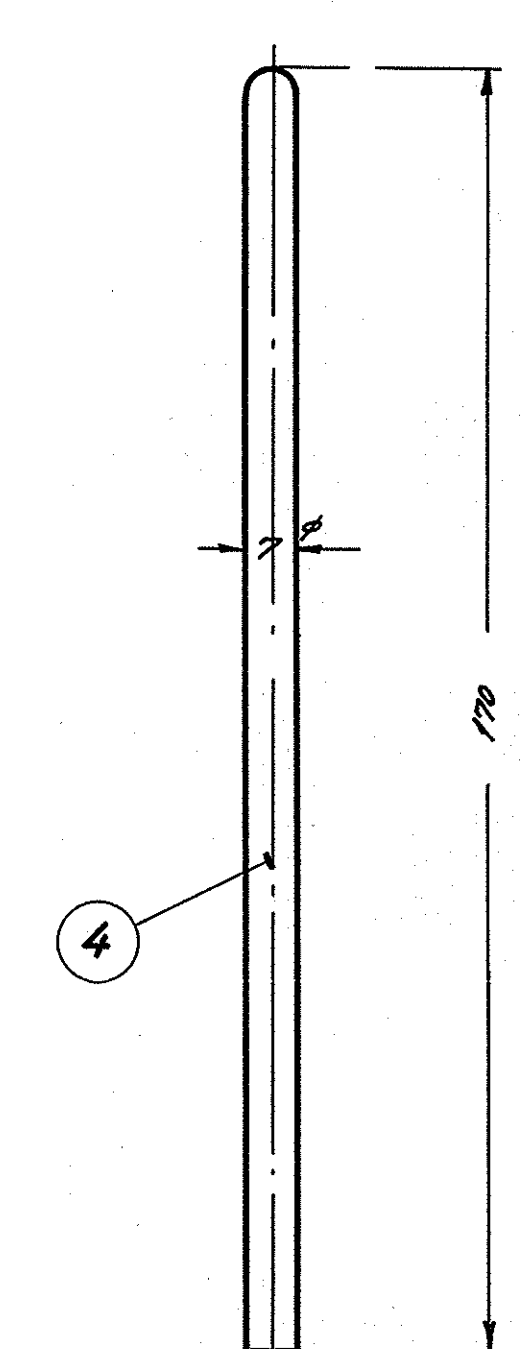

1	plade 15 mm	12	st. 00	20 x 5 x 15		
3	messingtråd 2φ x 10	11	messing	2φ x 50		
2	øje	10	st. 00	1 1/4 13 x 3 x 100		
2	øje	9	st. 00			
2	ribbe	8	messing	40 x 20 x 3		
2	skruer	7	messing	22φ x 80		
1	1/10φ stålrør	6		1/10φ x 360		
2	7φ x 120	5				
1	7φ x 170	4	bl. st.	7φ x 170		
1	7φ x 260	3				
1	messingprofil	2	messing	15 x 8 x 420		
1	plastikplade 400 x 120 x 3	1	perspex	neutral 900		
Stk.	Bezeichnung	Pos.	Materiale kvalitet	Model n. eller materiale-afmærkning	13	færdig vægt/stk.
Tegn.	E.U. 9-5-53	Rev.	23.54	Udsk.	IL	
Kalk.	G.B.	Norm.		Dato.		
Dato.		Revideret		Indt.		
16-53	Pos. 6 ændret. Pos. 12 tilføjet. H.O.					
Målestok: 1:1 1:2,5						
Anvendelse						Skrifttype m.
Diesel.el. 375 hk. loko.						12796
Tegningens benævnelse						Tegningens nummer
Solskoerm.						302L - 4.270
Indtekt: 2						

FRICHS