
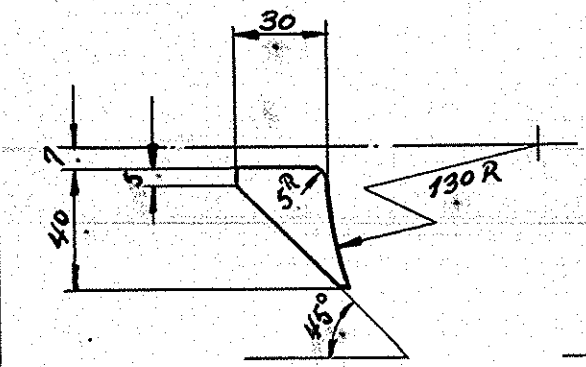


Betegnelse		fladjern 70x5			
qnt.lalt		Pos.	2	Mat	st.
Ordr		Stkl.	9485	Tegn	301L-16.920

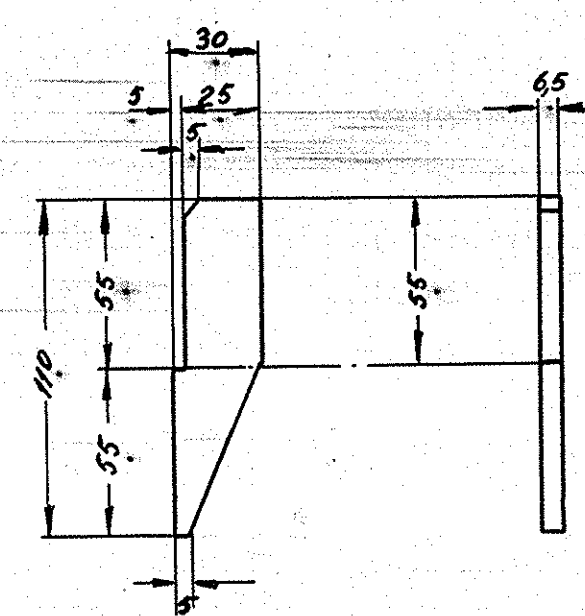

Betegnelse		flodjern		30 x 6,5	
Int. lolf	Pos.	4	Mat	st. 37	
Ord.	Stkl.	9485	Tegn	30/L-16.920	

Betegnelse		ribbe fladjern 26x			
Ant. lalt		Pos.	5	Mæl.	st. 37
ordr		S/klt.	9485	Tegn.	304L-16.920

8	<i>gederskiver</i>	$\frac{3}{8}$ "	7	<i>ff. st.</i>	<i>magasin</i>			
8	<i>bolt</i>	$\frac{3}{8}$ " x 30	<i>sort</i>	6	<i>st. 34</i>	<i>magasin</i>		
4	<i>Hadjern</i>	26 x 5	<i>ribbe</i>	5	<i>st. 37</i>	<i>l = 240</i>		
4	"	30 x 6,5		4	"	<i>l = 450</i>		
4	"	65 x 5		3		<i>l = 2700</i>		
2	<i>Hadjern</i>	70 x 5		2		<i>l = 500</i>		
2	<i>krøpplade</i>	5 mm		1		<i>700 x 250 x 5</i>		
Stk.	Betegnelse			Pos	Materiela kvalitet	model nr. eller materiale størrelse	nr	færdig
Tegn. <i>EL 12-5-52</i> Rev. <i>213/6 52</i> Afd. <i>VI</i> - kalk. <i>7.5.23-6-52</i> Norm. Dato				målestok: <i>1:25</i>				
Dato	Retteelse			Indes	<div>FRICHS</div>			
Anvendelse					Stykliste nr.			
<i>Diesel-el. 750 hk. loko.</i>					<i>9485.</i>			
tegningen benævneelse					Tegningens nummer			
<i>Opbængning af lyddæmper.</i>					<i>301L - 16.920.</i>			
Indes:								